



SATBSD290B
SATBSD290BE
SATBSD290C
SATBSD290CM
SATBSD290S
SATBSD290B2F
SATBSD290BE2F
SATBSD290C2F
SATBSD290S2F



SATBSD290B



SATBSD290BE



SATBSD290S



SATBSD290C



SATBSD290CM



SATBSD290B2F



SATBSD290BE2F



SATBSD290S2F




SATBSD290C2F




Technical drawing of a vertical pipe assembly. The drawing shows a side view of the assembly with the following dimensions and features:

- Overall Height:** 689
- Top Section:** A semi-circular top with a horizontal width of 222.
- Vertical Section:** A vertical pipe section with a diameter of $\phi 24$.
- Base Section:** A base section with a height of 191 and a total height of 255 from the ground level.
- Ground Level:** Indicated by a hatched area.
- Flange:** A flange with a diameter of $\phi 48$ is located at the base of the vertical section.
- Connection:** A connection labeled "2-G3/8" is shown at the bottom of the assembly.
- MAX 30:** A dimension indicating a maximum length of 30 for a specific component.

**SATBSD290B2F/SATBSD290BE2F/SATBSD290C2F/
SATBSD290S2F**

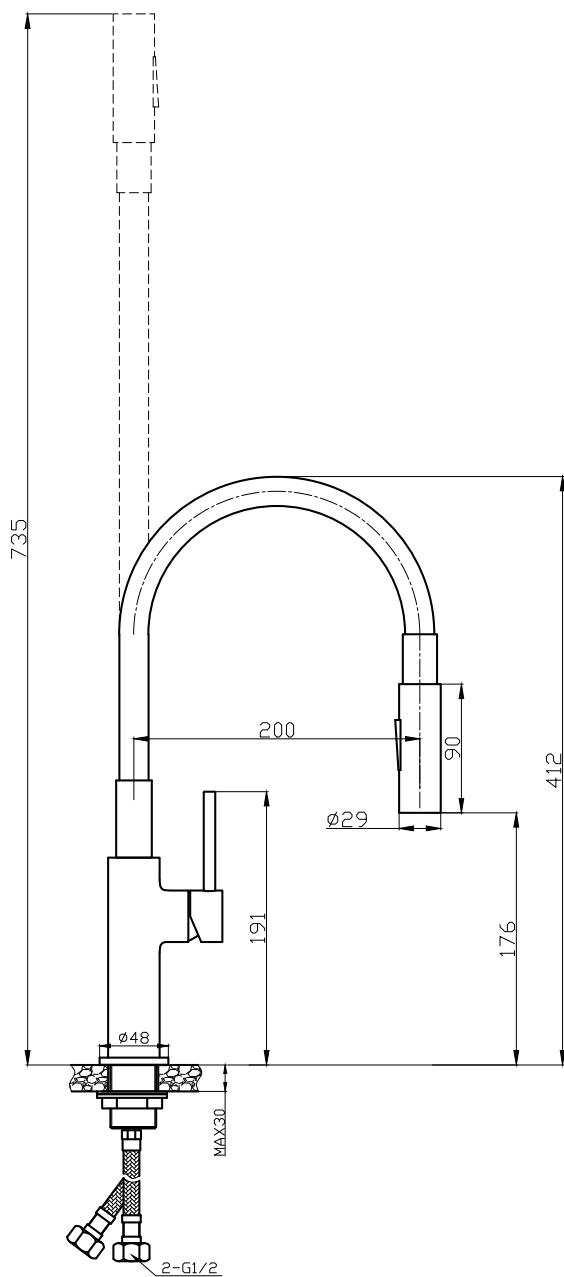

**SATBSD290B/SATBSD290BE/SATBSD290C/SATBSD290CM/
SATBSD290S**

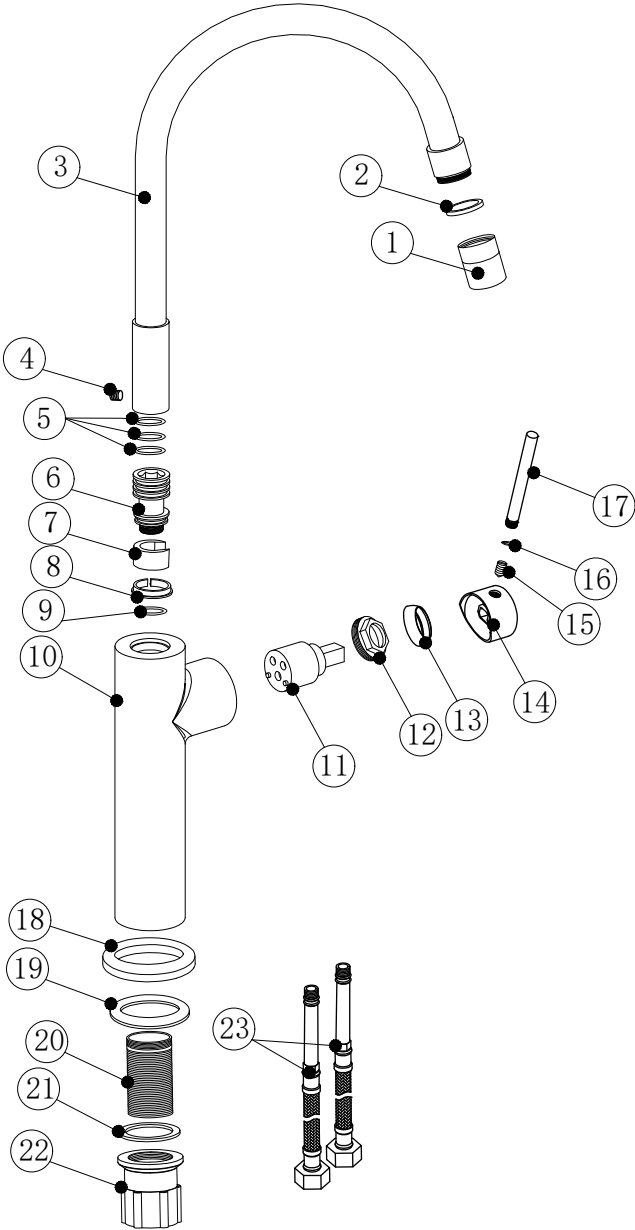

**SATBSD290B/SATBSD290BE/SATBSD290C/SATBSD290CM/
SATBSD290S**

1-2	NDBSD290PERL/NDBSD290PERLC
1-9	NDBSD290RAMB/NDBSD290RAMBE/ NDBSD290RAMC/NDBSD290RAMCM/ NDBSD290RAMS
11	NDBSD290KART
12	NDBSD29012
13	NDBSD29013/NDBSD29013C
14-17	NDBSD290PAKA/NDBSD290PAKAC
18-19	NDBSD29018/NDBSD29018C
20-22	NDBSD290UCHYCENI









This exploded view diagram illustrates the components of a faucet assembly, numbered 1 through 23. The main vertical assembly includes the faucet body (10), a curved spout (3), and a base (22). The handle assembly (1) is shown with its mounting hardware (2, 4, 5, 6, 7, 8, 9). The cartridge assembly (11) is shown with its internal components (12, 13, 14, 15, 16, 17). The base assembly (18, 19, 20, 21) is shown with its mounting hardware (23).

**SATBSD290B2F/SATBSD290BE2F/SATBSD290C2F/
SATBSD290S2F**

1-2	NDBSD2902FPERL
1-9	NDBSD290RAMB2F/NDBSD290RAMBE2F/ NDBSD290RAMC2F/NDBSD290RAMS2F
11	NDBSD290KART
12	NDBSD29012
13	NDBSD29013
14-17	NDBSD290PAKA
18-19	NDBSD29018
20-22	NDBSD290UCHYCENI

SATBSD290B/SATBSD290BE/SATBSD290C/SATBSD290CM/ SATBSD290S




SATBSD290B2F/SATBSD290BE2F/SATBSD290C2F/ SATBSD290S2F

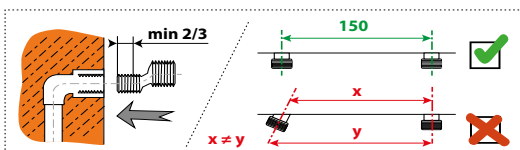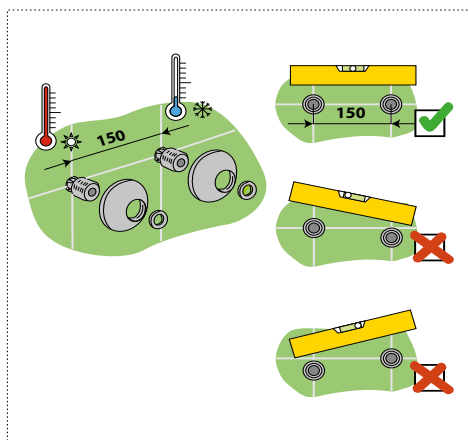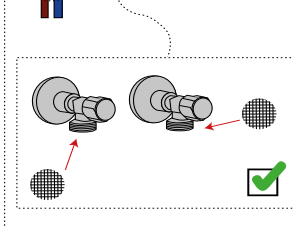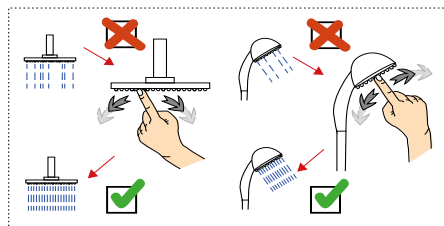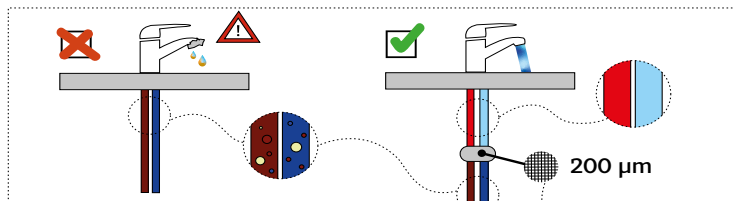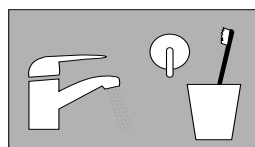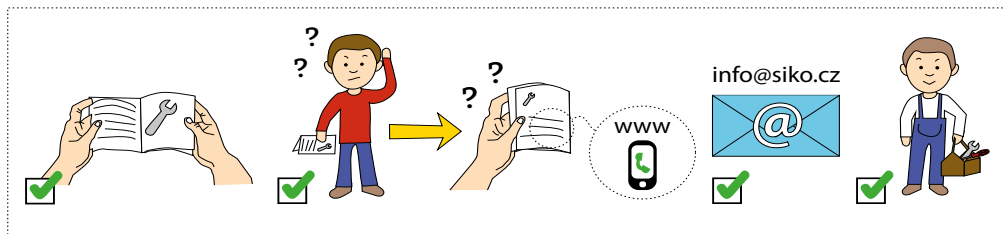

	P	P bar	max 10,0 min 1,0		5	
	T	°C	max 80° min 40°		65° 40°	

SATBSD290B/SATBSD290BE/SATBSD290C/SATBSD290CM/ SATBSD290S

SATBSD290B2F/SATBSD290BE2F/SATBSD290C2F/ SATBSD290S2F

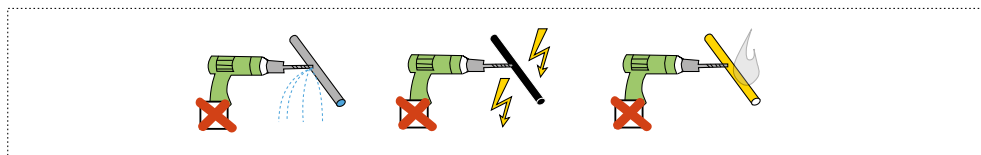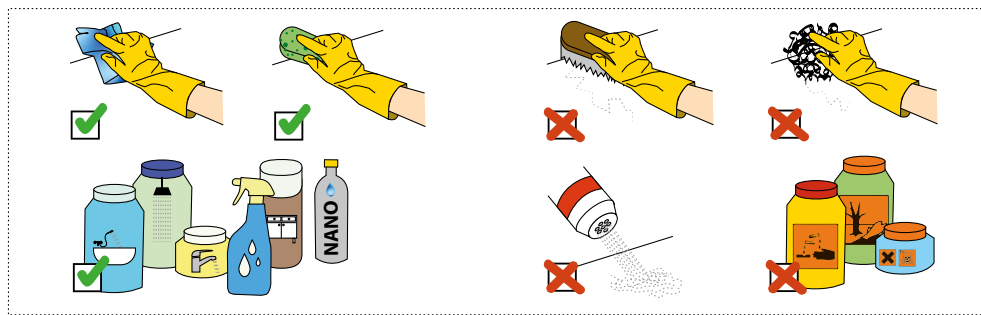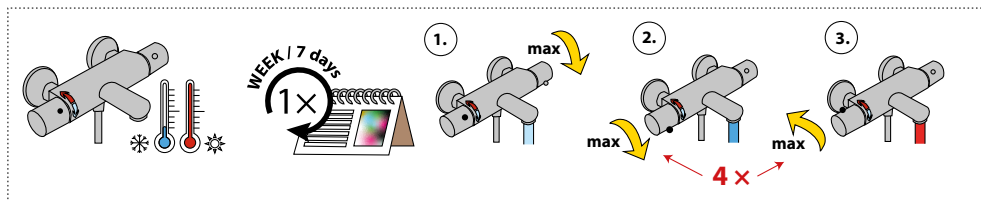

SAT® is registered trademark of



**Swiss
Aqua
Technologies**

Swiss Aqua Technologies AG
Gewerbestrasse 9, 6330 Cham, Switzerland
www.swatec.ch
Imported by SIKO KOUPELNY a.s.
Made in P.R.C.