SATAMZSLIM

SAT wc nádržka/modul na zazdění SLIM




Použití

Pro montáž závěsného WC s připojovací roztečí 180 mm nebo 230 mm
Pro závěsné WC
Pro zazdění a obezdění k nosné stěně – mokrý proces, stavební hloubka jen

86 mm
Vhodný pro rekonstrukce

Vlastnosti

- Duální splachování nezávisle nastavitelné s hygienickou rezervou
- Kompatibilní se všemi ovládacími tlačítky SAT
- Konstrukce polystyrenové izolace zabraňuje rosení na povrchu nádržky a tlumí prostup vibrací z nádržky do stavební konstrukce
- Kryt servisního otvoru zjednodušuje montáž a brání pronikání vlhkosti a nečistot
- Materiál nosné konstrukce: pozinkovaný kov
- Montážní hloubka nastavitelná v rozmezí 20–60 mm
- Montážní výška 1070 mm
- Nádržka je vyrobena z jednoho kusu, čímž je zaručena 100% nepropustnost
- Posuvný mechanismus držáku odpadu v osmi polohách ve vzdálenosti 0–93 mm
- Pozinkovaná nosná konstrukce se čtyřmi výklopnými držáky pro snadnou instalaci
- Přívod vody zezadu/shora uprostřed
- Rohový ventil s možností na napojení na potrubní systém Mepla
- Servisní práce bez použití nářadí
- Stavební hloubka 86 mm, s odpadním kolenem 125 mm
- Technické řešení umožňuje ukotvení do nerovného povrchu vysekaného do stěny bez nutnosti zarovnání zadní stěny v rozsahu 50 mm
- Vyjmutelný díl polystyrénu pro snadný přístup při instalaci

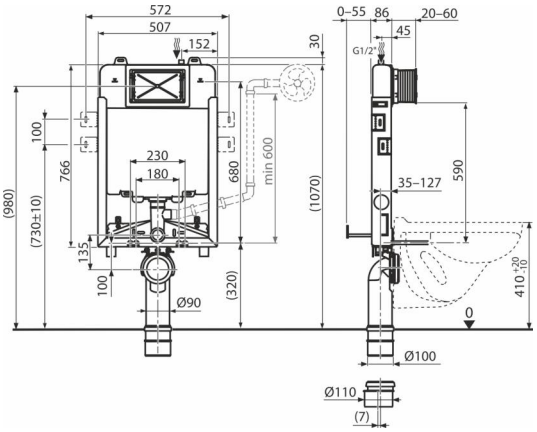

Rozsah dodávky

- Fixační set pro uchycení WC mísy: závitová tyč M12 – 2 ks, podložky – 4 ks, krytka – 2 ks, matice – 2 ks, chránička závitu – 2 ks
- Fixační set: vrut Ø8×60 – 4 ks, hmoždinka Ø12 – 4 ks
- Kryt servisního otvoru dvoudílný, jednoduše zkrátitelný
- Nádrž s napouštěcí a vypouštěcí armaturou
- Pozinkovaný rám včetně nosné konstrukce
- Redukce odpadu HT 90/100 polyethylen, PE+HD
- Sada instalačních krytek pro ochranu připojovacích otvorů při montáži systému
- Šroubení 1/2" pro připojení vody s integrovaným rohovým ventilem Schell 1/2"–3/8"
- Těsnění odpadu, propojka polypropylen, těsnění propojky
- Těsnění přívodu, vývodka polypropylen, vrapová vložka

Objednací kód, Logistické informace

Kód	EAN	Hmotnost (kus | balení | paleta)	Rozměr (kus | balení)	Množství (balení | paleta)
SATAMZSLIM	8592127222240	10,55 | 10,55 | 231,0 kg	1086×528×145 | 1080×522×140 mm	1 | 20 ks

Záruky

2/10 let

Normy

ČSN EN 14124, ČSN EN 14055

Technické parametry

- Doporučený rozsah tlaku vody 0,3-0,5 MPa
- Funkční rozsah tlaku vody 0,05-1,6 MPa
- Hygienická rezerva 3 l
- Objem vody v nádržce 9 l
- Připojení vody zezadu nebo shora montážními otvory G1/2 "
- Standardní nastavení malého spláchnutí 3 l
- Standardní nastavení velkého spláchnutí 6 l
- Zátěžová zkouška 400 kg

© 2024 Změny rozměrů a provedení vyhrazeny. |

SATAMZSLIM

SAT WC system for building into solid walls SLIM




Application

For installation of wall-hung WC pans with a connecting pitch of 180 mm or 230 mm
For wall-hung WC
For walling in and around the bearing wall - wet process, installation depth only 86 mm
Suitable for reconstruction

Features

- Dual flush independently adjustable with hygienic reserve
- The construction of polystyrene insulation prevents condensation forming on the surface of the tank and dampens the vibrations from the tank into the building structure
- The service opening cover simplifies assembly and prevents the penetration of moisture and impurities
- Material of the load bearing structure: galvanized metal
- Installation depth adjustable from 20–60 mm
- Mounting height 1070 mm
- The cistern is made of one piece, thus ensuring 100% impermeability
- Sliding rail holder for the waste connector can be set to eight positions between 0–93 mm
- Galvanized support structure with four hinged brackets for easy installation
- Water supply from the rear/top
- Angle valve with the ability to connect to the Mepla piping system
- Maintenance work without using any tools
- Installation depth 86 mm, with a 125 mm waste elbow
- This technical solution allows anchoring to an uneven surface of the back wall where a cut out was made, in the range of 50 mm
- Removable piece of polystyrene allows for easy access during installation

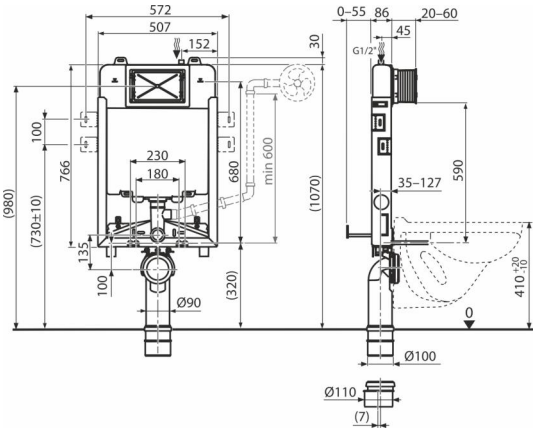

Scope of supply

- Fixation material for fixing the WC pan: threaded rod M12 – 2 pcs, washers – 4 pcs , cover – 2 pcs, nut – 2 pcs, thread protector – 2 pcs
- Fixation set: screw Ø8×60 – 4 pcs, dowel Ø12 – 4 pcs
- The 2 piece cover of the service opening is simply adjustable
- Cistern with fill and flush valve
- Galvanized frame including supporting structure
- Waste reduction HT 90/100 polyethylene, PE-HD
- End-caps set for protecting the connecting holes during installation of the system
- Fittings 1/2" water connection with the integrated angle valve Schell 1/2–3/8"
- Drainage seal, PP connector, connector seal
- Inlet seal, PP outlet, wrapping seal

Order number, Logistic information

Code	EAN	Weight (piece | packing | palett)	Dimensions (piece | packing)	Quantity (packing | palett)
SATAMZSLIM	8592127222240	10,55 | 10,55 | 231,0 kg	1086×528×145 | 1080×522×140 mm	1 | 20 pcs

Warranty

2/10 years

Norms

EN 14124, EN 14055

Technical specifications

- Recommended range of water pressure 0,3-0,5 MPa
- Functional range of water pressure 0,05-1,6 MPa
- Hygienic reserve 3 l
- Water volume in the cistern 9 l
- Water connection from the back or top via mounting holes G1/2 "
- Factory setting of small flush 3 l
- Factory setting of large flush 6 l
- Load test 400 kg

© 2024 Changes in dimensions and design reserved. |